



Flashblend Powder/Liquid Mixers

Capacity

Powder incorporation rates up to 30,000 lbs/hr.

Materials of Construction

All product contact parts are constructed in 316 stainless steel.

Motor Specification

The standard range of motors include TEFC and washdown duty. Stainless steel motors are available on request.

Cleaning

The Flashblend is designed to be Cleaned-In-Place (CIP) with Sterilize-In-Place (SIP) as an optional extra.


Electrical

Integral stainless steel control panel.

Sealing

Single mechanical shaft seals as standard. Double mechanical shaft seals and specialized arrangements are optional extras.

Flashblend Powder/Liquid Mixers

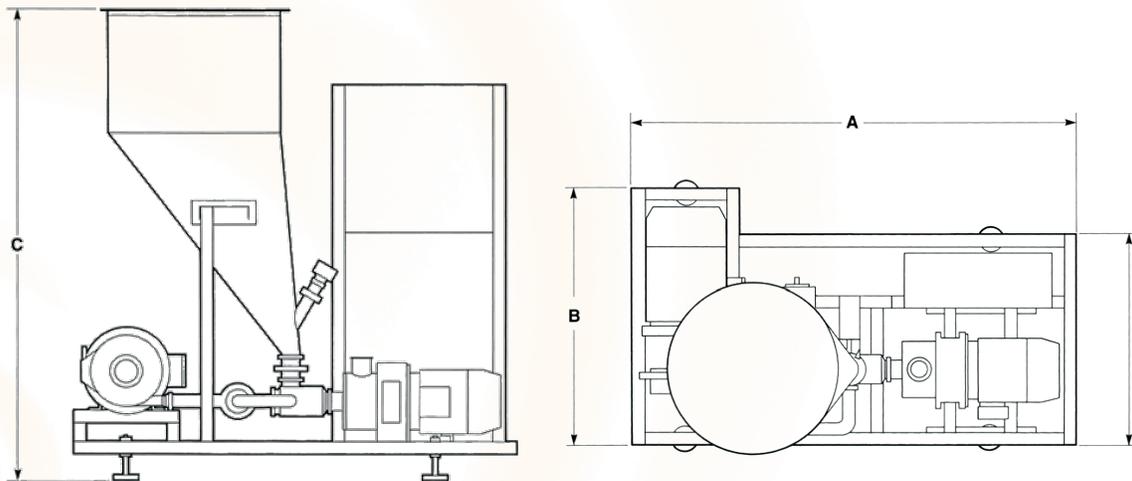

Model	A	B	C	Total Power HP	Typical Powder Flow Rate (lbs/min)	Standard Hopper Volume (cu ft)
FLB 20	57	25 ½	41	8 ½	30	0.35
FLB 30	49 ½	39 ½	52 ½	17 ½	50-100	3.5
FLB 45	71	40 ½	73	30	125-250	10.5
FLB 60	79	40 ½	75	50	300-550	10.5

* Powder flow rates are dependent on product characteristics.
 All dimensions shown are in inches. The dimensions shown are approximate and certified diagrams should be used for installation purposes.
 Silverson Machines reserves the right to change dimensions and specifications without notice.